


# Interprep Wipe Down Solvent

## Professional quality wipe down solvent

Professional wipe down solvent designed to remove surface contaminants, such as waxes, oils and sanding residues, prior to application of Interspray 900 finish.

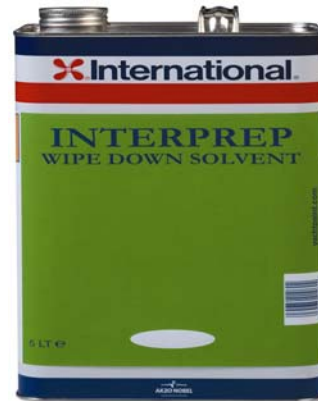

## KEY FEATURES AND BENEFITS

- Use to wipe down finish primers, and topcoats before and after sanding.
- Quickly and easily removes surface contaminants such as waxes, oils (including hand oils) and sanding residues that could otherwise impair the finish.
- Removes "latent moisture" from surface, which could cause the high gloss finish to look flat.
- For best results, use the Two Cloth Cleaning Method detailed below.

### Product Data:

AREA	Painted surfaces
SALES CODE	YTA002
METHOD OF APPLICATION	Cloth
PACK SIZES	5 Lt
Typical Shelf Life	2 years

Always read the label for Health and Safety precautions before use.

## SURFACE PREPARATIONS AND SYSTEMS

**Preparation:** Remove sanding dust by using a vacuum or compressed air while wiping the painted surface with clean dry cloths.

**Two Cloth Cleaning Method:** Surface should be cleaned using the "Two Cloth Cleaning Method". Soak one cloth in Interprep Wipe Down Solvent and use this to wet the surface. Quickly wipe with a dry second cloth to remove the contaminants. The solvent must not be allowed to dry on the surface. Work small areas at a time, so that the second cloth wipes it clean and dry. Repeat until all residue is removed, changing cloths frequently. For best results tack off the surface using tack rags.

**Hints:** Using only one set of cloths or one wet cloth only smears contamination around. Any sanding residue left on the surface can impair the finish.

## SYSTEMS AND COMPATIBILITY

Do not use for cleaning substrates such as aluminium.

Do not reduce, or use as thinner.

**Disclaimer:** The information given in this sheet is not intended to be exhaustive. Any person using the product without first making further enquiries as to the suitability of the product for the intended purpose does so at their own risk and we cannot accept any responsibility for the performance of the product or for any loss or damage (other than death or personal injury resulting from negligence) arising out of such use. The information contained in this sheet is liable to modification from time to time in the light of experience and our policy of continuous product development.



and International  
are registered trademarks  
of Akzo Nobel.

International Coatings Ltd, Stoneygate Lane, Felling, Gateshead, Tyne  
and Wear, United Kingdom, NE10 0JY

Apr-02