

# Interspray 900 Range

Professional finish

**Interspray 900 (YZ-series)** is the new and improved high gloss, two pack linear polyurethane from International Coatings.

The formulation has previously only been sold in North America, but due to its success we have now introduced the new version of **Interspray 900** to our European applicators.

**Interspray 900 (YZ-series)** has been formulated to offer outstanding spray characteristics, high flow to give that 'wet look' gloss and a sharp distinction of image (D.O.I). It is ideal for application to large yachts.

To accompany the durable **Interspray 900** topcoat, International has also launched 5 Interspray solvents: **Thinner 910, Thinner 915, Thinner 920, Thinner 925** and **Thinner 930** (Reducer). The wide range of thinners have been designed to optimize the spraying characteristics of **Interspray 900** over a broader temperature range, enabling application in a variety of ambient conditions.



## Interspray 900 Range now includes:

- Interspray 900 high gloss two-pack linear PU 21 standard colours
- Polyurethane Matting Additive
- Interspray Accelerator for reduction of curing time

Temperature Thinners	10°C (50°F)	15°C (59°F)	20°C (68°F)	25°C (77°F)	30°C (86°F)	35°C (95°F)
YTA910 (Fast)						
YTA915						
YTA920						
YTA925						
80:20 YTA925/YTA930 blend						

For further details on International's professional schemes refer to the Interspray Application Manual or your local sales representative.

## SYSTEMS AND COMPATIBILITY

Interspray 900 polyurethane topcoat should only be applied over sanded polyurethane finishes, International's Polyurethane Basecoat or Interprime 880.

## **PRODUCT DATA**

**Product Code and Colour:** Please refer to the individual Product Datasheet.

**Application method:** Conventional Spray for Interspray 900 topcoat.

**Thinner/ Cleaner:** Thin using YTA900 series thinners. Refer to Product Datasheet.

**Application temperature:** Minimum 10°C (50°F), Maximum 40°C (104°F).



## **SURFACE PREPARATION AND SYSTEM**

For Steel, Aluminium, Wood, Gelcoat/Composites – refer to International’s Professional Paint Systems in the Interspray Application Manual. Schemes and quotes are also available from your local International sales representative.

**Typical Schemes:** For reference use only.

Steel/Aluminium with Fairing:

GRP Skim Fair System:

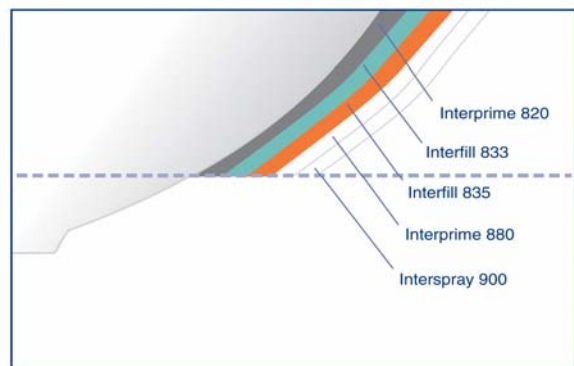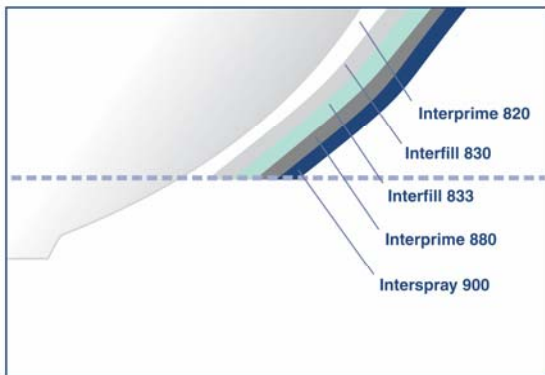

## **RELATED PRODUCTS**

Product Code	Description
YQA100	Interspray Accelerator
YZM914	Polyurethane Matting Additive
YZ-series (e.g. YZB901)	Interspray 900 High Performance Polyurethane
YRA800, YRA802, YRA805	Polyurethane Basecoat
YPA883, YPA884, YPA885	Interprime 880 Epoxy Finishing Primer
YTA910, 915, 920, 925, 930	YTA900 series Interspray Solvents

**Disclaimer** The information given in this sheet is not intended to be exhaustive. Any person using the product without first making further enquiries as to the suitability of the product for the intended purpose does so at their own risk and, to the extent permitted by law, we can accept no responsibility for the performance of the product or for any loss or damage arising out of such use. The information contained in this sheet is liable to modification from time to time in the light of experience and our policy of continuous product development.

✳️ and International ® are registered trademarks of, or licensed to, Akzo Nobel. © Akzo Nobel, 2003  
All products marked ® are registered products of International Coatings Ltd.

International Coatings Ltd., 24-30 Canute Road, Southampton, Hampshire, SO14 3PB.  
Tel: 023 8022 6722 Fax: 023 8033 5975

